


Shadowspec UNITY Multi-Canopy Cantilever Umbrella



The Evolution of Shade



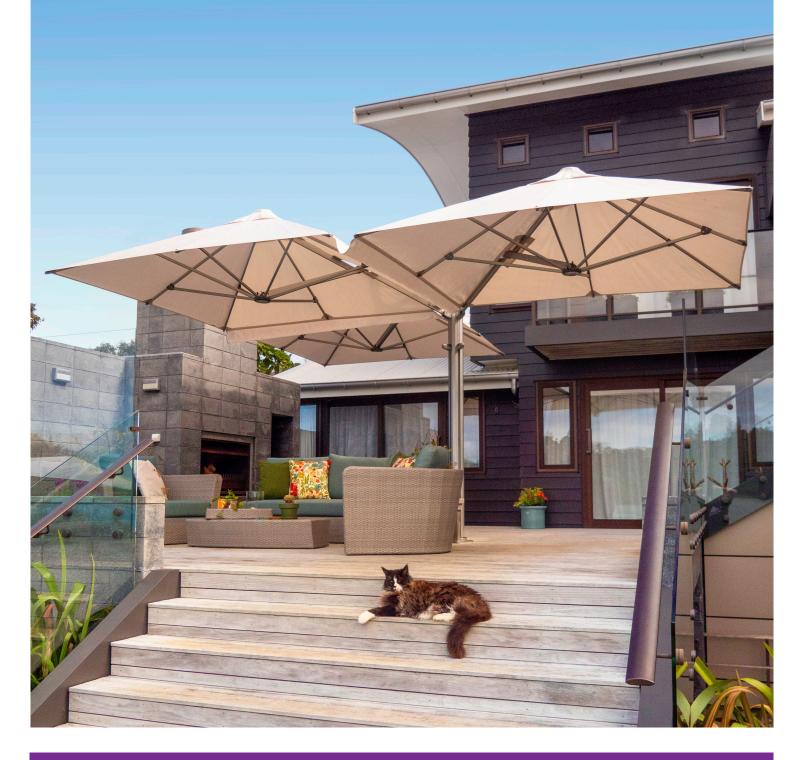







SHADOWSPEC UNITY™ Multi-Canopy Cantilever Umbrella

Patented & Trademarked Technology



SHADOWLIFT™ Gas-assisted deployment for an easy lift.



SHADOWGLIDE™ Engineered to open or close in 5 seconds.



SHADOWHUB™ LED light technology built-in and app controlled.



SHADOWLOCK™ Integrated security and wind-protection.

Canopy

Stock Colours



Oyster



Charcoal Tweed



Alpine Stone



Black

Special-Order Colours**



Natural



Fern



Storm



Linen



Charcoal

Sunflower Yellow



Captain Navy



Fabric Warranty* BEST-IN-CLASS

Taupe



Terracotta

sunbrella


RECASENS

Solution Dyed Acrylic

Some fabric dying methods only coat the outer surface of the fibre - think of a radish.

With the Solution Dyed method, each individual thread fibre is dyed - think of a beetroot. The fabric is also easy to clean and covered by a 10 year warranty.

Frame Colour



Space Grey



Heron Black***



***Available in 3.0m Square or 4.0m Octagon sizes only.

























Resistant


^{**}Special-Order Colours are non-stock and will incur an additional lead time and surcharge. Full Sunbrella Marine Range or other identical fabrics are available as a custom colour option.

Size & Configuration

OCTAGON UNO 3.5m | 11' or 4.0m | 13'




OCTAGON DUO 7.0m | 22' or 8.0m | 26'




SQUARE UNO 2.5m | 8' or 3.0m | 10'




SQUARE DUO 5.0m | 16' or 6.0m | 20'




SQUARE DUO 5.0m | 16' or 6.0m | 20'



SQUARE TRIO 5.0m | 16' or 6.0m | 20'



SQUARE QUATTRO 5.0m | 16' or 6.0m | 20'



All sizings and conversions are approximate and subject to change without notice. Refer to specsheets for exact, up-to-date measurements.

IN-GROUND

ANCHOR

For mounting with

a concrete footing.

Mounting Options

SURFACE PLATE

For deck, patio and concrete mounting. (316 stainless steel)



Note: Fastenings are not supplied for the Surface Plate or Wall Mount Bracket.

Features




EASY OPEN & CLOSE

Umbrella deployment system with no winding or cables.



MARINE GRADE

No-rust, 316 Stainless Steel Spigot.



FOLLOW THE SUN

Enjoy the 360° rotation for all-day-shade.



Fabric Warranty*

c Frame nty* Warranty*

BEST-IN-CLASS WARRANTY

Accessories

N.b. Accessories are optional. Pricing additional.



RAIN GUTTER

Connects adjoining canopies to enhance rain protection.



LED LIGHT CONTROL

Power your light with the Smart Battery or Hardwire Kit.



PROTECTION COVER

Recommended protection for your umbrella when not in use.



CASTOR WHEELS FOR FREE-STANDING BASE

WALL MOUNT BRACKET

For when ground mounting isn't possible. (316 stainless steel)



FREE-STANDING BASE + ALUMINIUM BASE COVER


For complete customised manoeuvrability.





Available in Space Grey or Heron Black.


Concrete pavers (not included) are required for ballast. Optional Castor Wheels available.

Dimensions

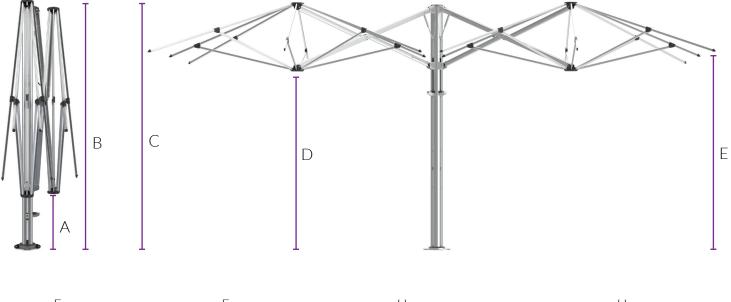










Diagram Legend			2.5m	8'	3.0m	10'	3.5m	11'	4.0m	13'
	Α	Ground to central frame hub when closed †	860mm	2'10''	620mm	2'1''	1079mm	3'7"	866mm	2'10''
	В	Total height to top of canopy †	2900mm	9'6"	2824mm	9'3"	2975mm	9'9"	2899mm	9'6''
	С	Height of umbrella to top of mast cap+	2908mm	9'6"	2908mm	9'6''	2908mm	9'7"	2908mm	9'6''
	D	Ground to central frame hub when open +	2130mm	7'0''	2054mm	6'9''	2205mm	7'3''	2128mm	7'0''
	Ε	Ground to lower outer edge of canopy †	2222mm	7'3''	2219mm	7'3''	2237mm	7'4''	2172mm	7'2''
	F	Centre of Spigot to outside edge of canopy	2646mm	8'8"	2973mm	9'10''	3447mm	11'4''	3923mm	12'10''
	G	Diagonal from centre of mast to corner	3742mm	12'3''	4205mm	13'10''	N/A	N/A	N/A	N/A
	Н	Duo/Quattro umbrella width edge to edge	5292mm	17'4''	5946mm	19'6''	6894mm	22'7''	7846mm	25'9''
	ı	Gutter space between canopies	160mm	6''	160mm	6''	N/A	N/A	N/A	N/A

 † Free-standing Base installations will add † 165mm | 6" to the height and surface plates will add † 12" to the height. Adding the optional Castor Wheels to the Free-standing Base will increase height a further † 5-80mm | 2-3" to the height. All sizings and conversions are approximate and subject to change without notice. Refer to specsheets for exact, up-to-date measurements.

